


## High Speed Switching Diode



### SOT-23

#### Features

Epoxy meets UL-94 V-0 flammability rating and halogen free  
 Moisture Sensitivity Level 1  
 $V_R$  75V  
 $I_{FAV}$  150mA  
 Part no. with suffix "Q" means AEC-Q101 qualified

#### Applications

Extreme fast switches  
 Automotive

#### Mechanical Data

**Case:** SOT-23  
**Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102  
**Polarity:** Cathode line denotes the cathode end  
**Marking:** A6

#### Maximum Ratings ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	VALUE
Reverse Voltage	$V_R$	V		75
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		100
Average Forward Current	$I_{FAV}$	mA		150
Repetitive Peak Forward Current	$I_{FRM}$	mA		300
Peak Forward Surge Current	$I_{FSM}$	A	Pulse width=1 us Pulse width=1 s	2 1
Power Dissipation	$P_{tot}$	mW		350
Thermal Resistance Junction to Ambient	$R_{thJA}$	K/W		357
Maximum Junction Temperature	$T_j$	$^\circ\text{C}$		-55 to +150
Storage Temperature Range	$T_{stg}$	$^\circ\text{C}$		-55 to +150



# BAS16Q

## Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	MIN	MAX
Forward Voltage	V <sub>F</sub>	V	I <sub>F</sub> =1mA		0.715
			I <sub>F</sub> =10mA		0.855
			I <sub>F</sub> =50mA		1.0
			I <sub>F</sub> =150mA		1.25
Reverse Current	I <sub>R</sub>	μA	V <sub>R</sub> =75V		1.0
Breakdown Voltage	V <sub>R</sub>	V	I <sub>R</sub> =10μA	75	
Diode Capacitance	C <sub>D</sub>	pF	V <sub>R</sub> =V <sub>F</sub> =0V, f =1MHz		4
Reverse Recovery Time	t <sub>rr</sub>	ns	I <sub>F</sub> =10mA, I <sub>rr</sub> =0.1I <sub>R</sub> , R <sub>L</sub> =100		4

## Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAS16Q	F2	Approximate 0.010	3000	30000	120000	7" reel



## Characteristics (Typical)

Fig.1:  $P_D-T_A$

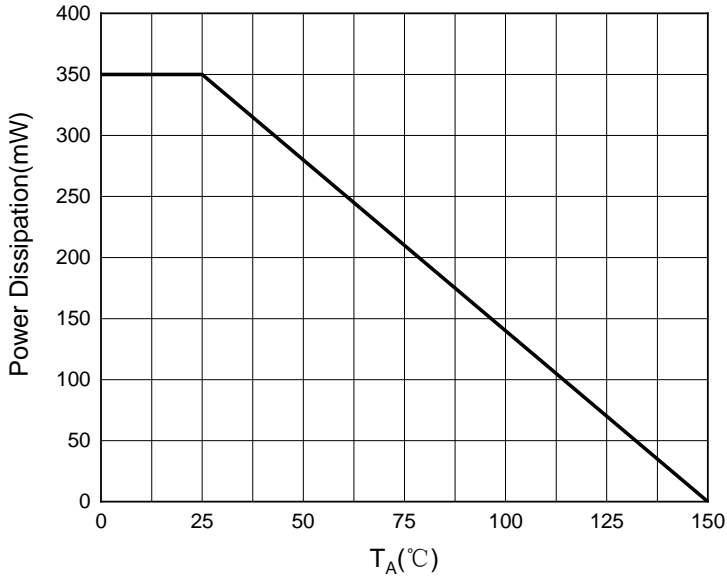


Fig.2: Capacitance Characteristics

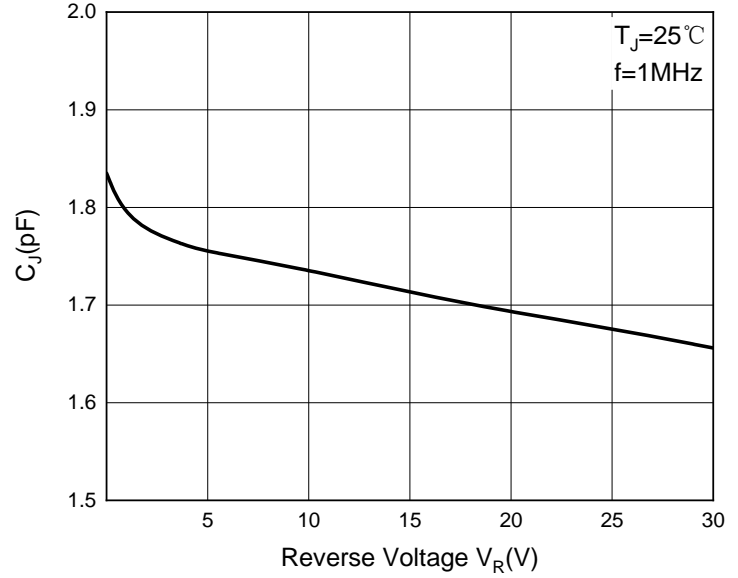


Fig.3: Forward Characteristics


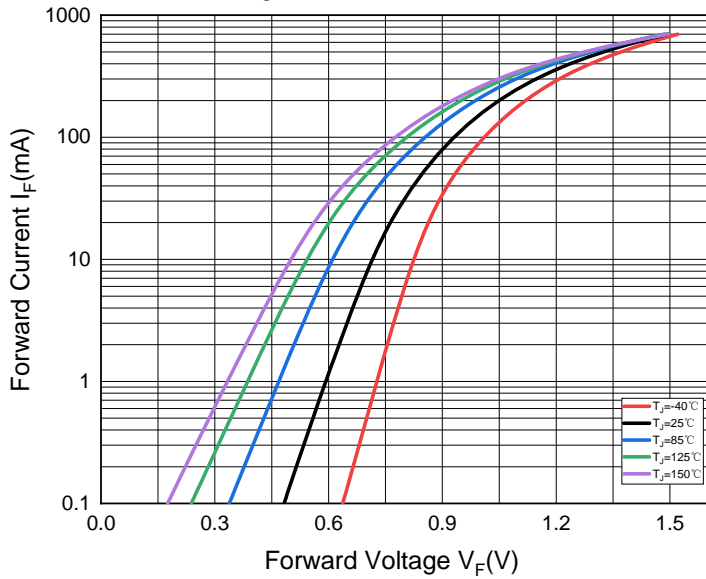






Fig.4: Reverse Characteristics



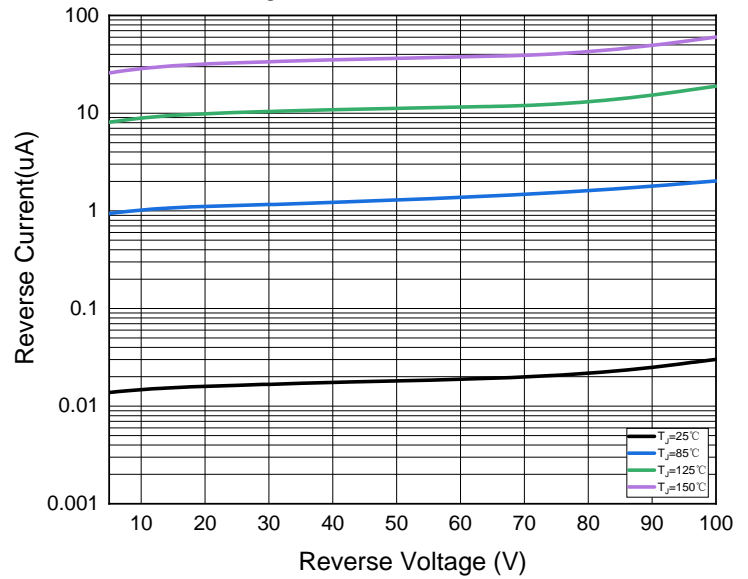

# BAS16Q

## Outline Dimensions




UNIT: mm

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

NOTE:  
 1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.  
 2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.  
 3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

## Marking Information

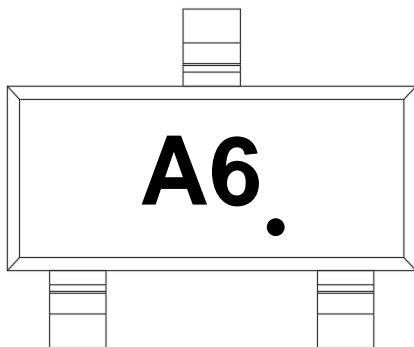

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. Body color: Black



## BAS16Q

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.